


Trefoil Canopy Fixtures

skill level • basic electrician


installation instructions

• toolbox



These installation steps apply to both wall and ceiling fixtures of this style.

1. Unscrew ball-headed screws and remove crossbar from fixture canopy.
2. Position crossbar on electrical box. Using crossbar as a template, mark center points of the three holes at outer ends of crossbar.

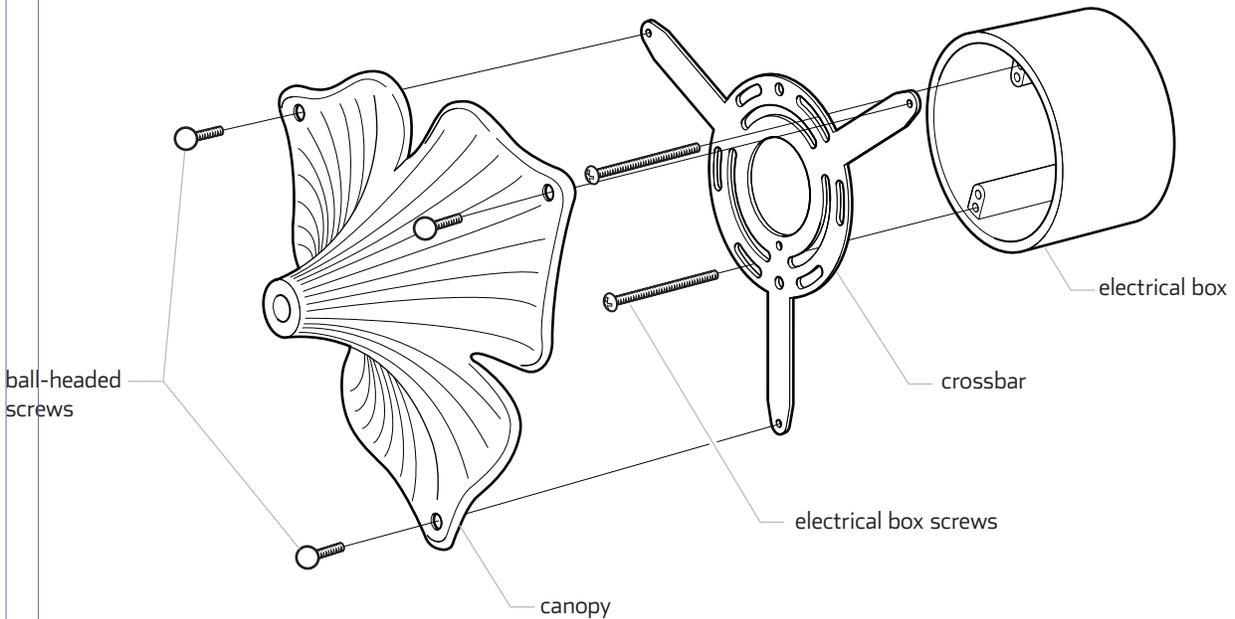

3. Where marked, drill clearance holes about 1/4" round by 1/4" deep.
Clearance holes will provide a space for fixture mounting screws to protrude into as they are tightened.
4. Attach the crossbar to electrical box using screws supplied with the box.
Curved slots in crossbar allow fixture to be squared to the room, regardless of position of screw holes in the electrical box.
5. Make wiring connections in accordance with local electrical codes.
See "Important Information" on reverse side.
6. To mount fixture, align canopy over crossbar and secure with the ball-headed screws. Tighten finger tight.

Complete !

REJUVENATION®